




# EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

## CIRCULAR LED EXE-P-GE-IP40

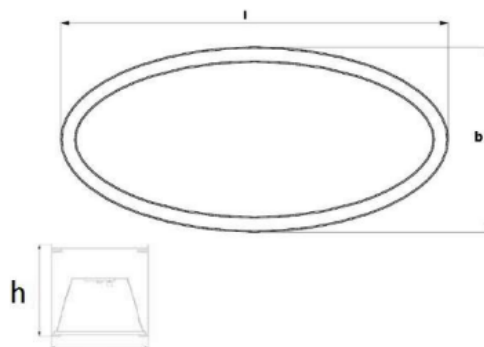

### DATE ELECTRICE


Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	120°
Optional	dimabil/kit emergenta

### DATE TEHNICE

Montaj	APLICAT
Material	ALUMINIU
Finisaj	ALB/NEGRU/RAL
Factor protectie [IP]	IP40
Factor protectie [IK]	IK08
Temperatura	5°C ... +30°C
Durata medie [h]	60000

### MODELE

Cod	Descriere
EXE-P-GE-79W-IP40	EXE CIRCULAR LED 79W, 7755LM, 2700/6500K, 576X1620X73 mm, IP40
EXE-P-GE-120W-IP40	EXE CIRCULAR LED 120W, 11670LM, 2700/6500K, 576X1620X73 mm, IP40
EXE-P-GE-105W-IP40	EXE CIRCULAR LED 105W, 10340LM, 2700/6500K, 956X2006X73 mm, IP40
EXE-P-GE-160W-IP40	EXE CIRCULAR LED 160W, 15560LM, 2700/6500K, 956X2006X73 mm, IP40



### Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135  
[www.exeholding.com](http://www.exeholding.com); [office@exeholding.com](mailto:office@exeholding.com); Phone: +40 722 241 231