




EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

CORP DE ILUMINAT LED EXE-P-ES-IP40

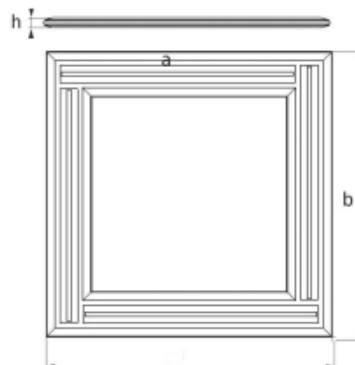

DATE ELECTRICE

Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	120°
Optional	dimabil/kit de emergenta

DATE TEHNICE

Montaj	APLICAT/SUSPENDAT
Material	ALUMINIU
Finisaj	ALB/NEGRU/RAL
Factor protectie [IP]	IP40
Factor protectie [IK]	IK08
Temperatura	5°C ... +30°C
Durata medie [h]	60000

MODELE

Cod	Descriere
EXE-P-ES-53W-IP40	EXE CORP DE ILUMINAT 53W, 4640LM, 2700/6500K, 777X777X37 mm, IP40
EXE-P-ES-79W-IP40	EXE CORP DE ILUMINAT 79W, 6955LM, 2700/6500K, 1058X1058X37 mm, IP40
EXE-P-ES-105W-IP40	EXE CORP DE ILUMINAT 105W, 9275LM, 2700/6500K, 1339X1339X37 mm, IP40
EXE-P-ES-66W-IP40	EXE CORP DE ILUMINAT 66W, 5795LM, 2700/6500K, 777X1058X37 mm, IP40
EXE-P-ES-79W-IP40	EXE CORP DE ILUMINAT 79W, 6955LM, 2700/6500K, 777X1339X37 mm, IP40
EXE-P-ES-92W-IP40	EXE CORP DE ILUMINAT 92W, 8115LM, 2700/6500K, 1058X1339X37 mm, IP40



Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231