




Exe Holding - TRIPROOF 27W, 600mm

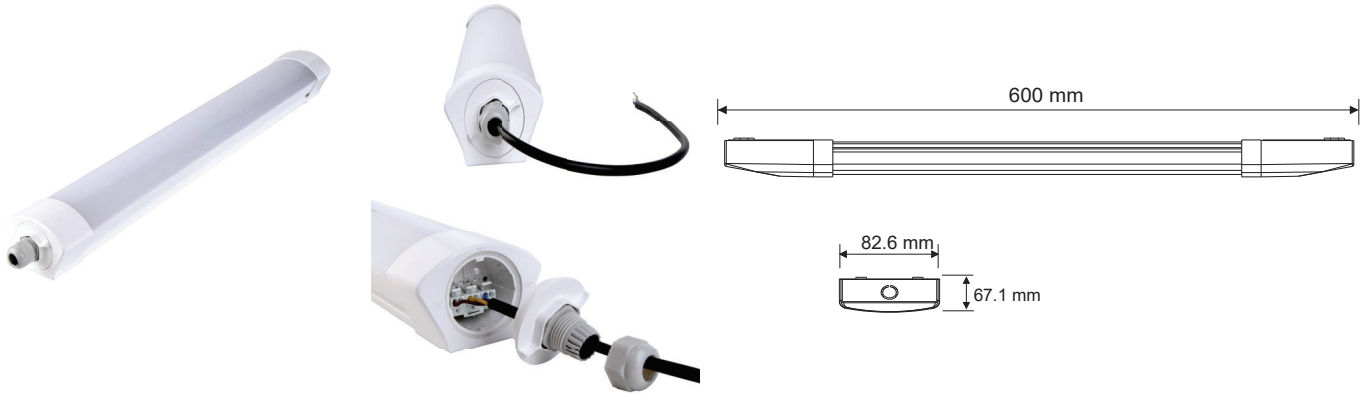

DATE ELECTRICE

Voltage [V]	220 - 240
Frecventa [Hz]	50 / 60
Putere [W]	27
Sursa	LED
Power factor PF	> 0.9
Clasa protectie electrica	II
Optional*	kit emergenta 2h / 3h

DATE FOTOMETRICE

Flux luminos [lm]	3510
Optica [°]	180
CRI [RA]	>80
CCT[K]	4000 / 6000

DIMENSIUNI

Lungime [mm]	600
Latime [mm]	82.6
Inaltime [mm]	67.1

DATE TEHNICE

Montaj	APLICAT / SUSPENDAT
Material	PC
Finisaj	ALB
Protectie [IP]	65
Protectie impact [IK]	08
Temperatura [°C]	-10...+40
Durata medie [h]	50 000
Dimabil	NU

