



EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

LINIAR LED EXE-P-GF-IP40



DATE ELECTRICE

| | |
|-----------------|---------|
| Voltage [V] | 220-240 |
| Frecventa [Hz] | 50/60 |
| Sursa | LED |
| Power factor PF | >0.9 |
| CRI [RA] | >80 |
| Optica | 120° |

DATE TEHNICE

| | |
|-----------------------|---------------|
| Montaj | APLICAT |
| Material | ALUMINIU |
| Finisaj | ALB |
| Factor protectie [IP] | IP40 |
| Factor protectie [IK] | IK08 |
| Temperatura | 5°C ... +30°C |
| Durata medie [h] | 60000 |

MODELE

| Cod | Descriere |
|--------------------|--|
| EXE-P-GF-21W-IP40 | EXE LINIAR LED 21W, 1910LM, 2700K/6500K, 79X620X82 mm, IP40 |
| EXE-P-GF-26W-IP40 | EXE LINIAR LED 26W, 2550LM, 2700K/6500K, 79X800X82 mm, IP40 |
| EXE-P-GF-33W-IP40 | EXE LINIAR LED 33W, 3185LM, 2700K/6500K, 79X980X82 mm, IP40 |
| EXE-P-GF-39W-IP40 | EXE LINIAR LED 39W, 3820LM, 2700K/6500K, 79X1155X82 mm, IP40 |
| EXE-P-GF-53W-IP40 | EXE LINIAR LED 53W, 5095LM, 2700K/6500K, 79X1500X82 mm, IP40 |
| EXE-P-GF-66W-IP40 | EXE LINIAR LED 66W, 6365LM, 2700K/6500K, 79X1890X82 mm, IP40 |
| EXE-P-GF-79W-IP40 | EXE LINIAR LED 79W, 7640LM, 2700K/6500K, 79X2255X82 mm, IP40 |
| EXE-P-GF-92W-IP40 | EXE LINIAR LED 92W, 8915LM, 2700K/6500K, 79X2610X82 mm, IP40 |
| EXE-P-GF-105W-IP40 | EXE LINIAR LED 105W, 10185LM, 2700K/6500K, 79X2950X82 mm, IP40 |
| EXE-P-GF-14W-IP40 | EXE LINIAR LED 14W, 1275LM, 2700K/6500K, 79X800X82 mm, IP40 |
| EXE-P-GF-21W-IP40 | EXE LINIAR LED 21W, 1910LM, 2700K/6500K, 79X1155X82 mm, IP40 |
| EXE-P-GF-26W-IP40 | EXE LINIAR LED 26W, 2550LM, 2700K/6500K, 79X1500X82 mm, IP40 |



Romania Office & Production:


Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231



EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

| | |
|-------------------|--|
| EXE-P-GF-33W-IP40 | EXE LINIAR LED 33W, 3185LM, 2700K/6500K, 79X1890X82 mm, IP40 |
| EXE-P-GF-39W-IP40 | EXE LINIAR LED 39W, 3820LM, 2700K/6500K, 79X2255X82 mm, IP40 |
| EXE-P-GF-47W-IP40 | EXE LINIAR LED 47W, 4455LM, 2700K/6500K, 79X2610X82 mm, IP40 |
| EXE-P-GF-53W-IP40 | EXE LINIAR LED 53W, 5095LM, 2700K/6500K, 79X2950X82 mm, IP40 |
| EXE-P-GF-60W-IP40 | EXE LINIAR LED 60W, 5730LM, 2700K/6500K, 79X3315X82 mm, IP40 |
| EXE-P-GF-66W-IP40 | EXE LINIAR LED 66W, 5730LM, 2700K/6500K, 79X3675X82 mm, IP40 |
| EXE-P-GF-8W-IP40 | EXE LINIAR LED 8W, 640LM, 2700K/6500K, 79X800X82 mm, IP40 |
| EXE-P-GF-14W-IP40 | EXE LINIAR LED 14W, 1275LM, 2700K/6500K, 79X1500X82 mm, IP40 |
| EXE-P-GF-21W-IP40 | EXE LINIAR LED 21W, 1910LM, 2700K/6500K, 79X2255X82 mm, IP40 |
| EXE-P-GF-26W-IP40 | EXE LINIAR LED 26W, 2550LM, 2700K/6500K, 79X2950X82 mm, IP40 |
| EXE-P-GF-33W-IP40 | EXE LINIAR LED 33W, 3190LM, 2700K/6500K, 79X3675X82 mm, IP40 |
| EXE-P-GF-8W-IP40 | EXE LINIAR LED 8W, 640LM, 2700K/6500K, 79X282X82 mm, IP40 |
| EXE-P-GF-14W-IP40 | EXE LINIAR LED 14W, 1275LM, 2700K/6500K, 79X565X82 mm, IP40 |
| EXE-P-GF-21W-IP40 | EXE LINIAR LED 21W, 1910LM, 2700K/6500K, 79X845X82 mm, IP40 |
| EXE-P-GF-26W-IP40 | EXE LINIAR LED 26W, 2550LM, 2700K/6500K, 79X125X82 mm, IP40 |
| EXE-P-GF-33W-IP40 | EXE LINIAR LED 33W, 3185LM, 2700K/6500K, 79X1405X82 mm, IP40 |
| EXE-P-GF-39W-IP40 | EXE LINIAR LED 39W, 3820LM, 2700K/6500K, 79X1685X82 mm, IP40 |
| EXE-P-GF-47W-IP40 | EXE LINIAR LED 47W, 4455LM, 2700K/6500K, 79X1965X82 mm, IP40 |
| EXE-P-GF-53W-IP40 | EXE LINIAR LED 53W, 5095LM, 2700K/6500K, 79X2254X82 mm, IP40 |
| EXE-P-GF-60W-IP40 | EXE LINIAR LED 60W, 5730LM, 2700K/6500K, 79X2525X82 mm, IP40 |
| EXE-P-GF-66W-IP40 | EXE LINIAR LED 66W, 6365LM, 2700K/6500K, 79X2810X82 mm, IP40 |

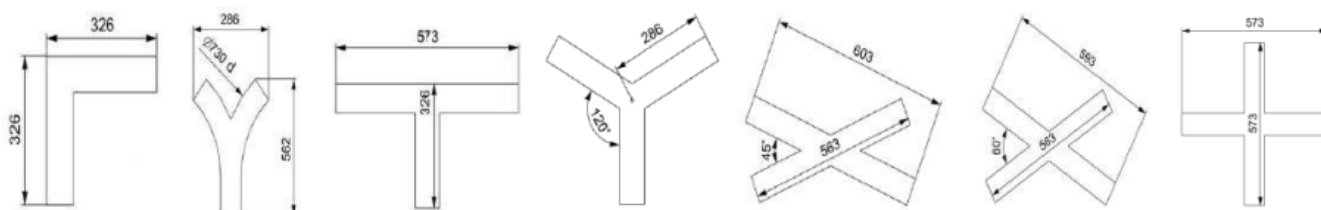

Romania Office & Production:

Aeroportului no.141 Street, Mogoșoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231