




CIRCULAR LED EXE-P-GD-IP40

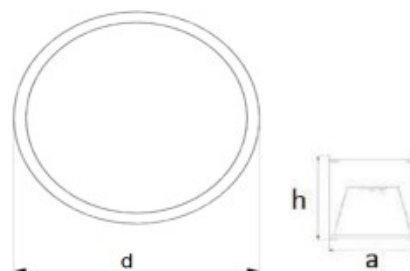

DATE ELECTRICE

Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	120°
Optional	dimabil/kit emergenta

DATE TEHNICE

Montaj	APLICAT
Material	ALUMINIU
Finisaj	ALB/NEGRU/RAL
Factor protectie [IP]	IP40
Factor protectie [IK]	IK08
Temperatura	5°C ... +30°C
Durata medie [h]	60000

MODELE

Cod	Descriere
EXE-P-GD-26W-IP40	EXE CIRCULAR LED 26W, 2585LM, 2700/6500K, 79X447X73 mm, IP40
EXE-P-GD-39W-IP40	EXE CIRCULAR LED 39W, 3880LM, 2700/6500K, 79X620X73 mm, IP40
EXE-P-GD-61W-IP40	EXE CIRCULAR LED 61W, 5835LM, 2700/6500K, 79X620X73 mm, IP40
EXE-P-GD-53W-IP40	EXE CIRCULAR LED 53W, 5170LM, 2700/6500K, 79X800X73 mm, IP40
EXE-P-GD-80W-IP40	EXE CIRCULAR LED 80W, 7780LM, 2700/6500K, 79X800X73 mm, IP40



Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231



EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

EXE-P-GD-66W-IP40	EXE CIRCULAR LED 66W, 6460LM, 2700/6500K, 79X980X73 mm, IP40
EXE-P-GD-100W-IP40	EXE CIRCULAR LED 100W, 9725LM, 2700/6500K, 79X980X73 mm, IP40
EXE-P-GD-79W-IP40	EXE CIRCULAR LED 79W, 7755LM, 2700/6500K, 79X1155X73 mm, IP40
EXE-P-GD-120W-IP40	EXE CIRCULAR LED 120W, 11670LM, 2700/6500K, 79X1155X73 mm, IP40
EXE-P-GD-92W-IP40	EXE CIRCULAR LED 92W, 9045LM, 2700/6500K, 79X1335X73 mm, IP40
EXE-P-GD-140W-IP40	EXE CIRCULAR LED 140W, 13615LM, 2700/6500K, 79X1335X73 mm, IP40
EXE-P-GD-105W-IP40	EXE CIRCULAR LED 105W, 10340LM, 2700/6500K, 79X1335X73 mm, IP40
EXE-P-GD-160W-IP40	EXE CIRCULAR LED 160W, 15560LM, 2700/6500K, 79X1500X73 mm, IP40
EXE-P-GD-132W-IP40	EXE CIRCULAR LED 132W, 13300LM, 2700/6500K, 79X1890X73 mm, IP40
EXE-P-GD-200W-IP40	EXE CIRCULAR LED 200W, 20020LM, 2700/6500K, 79X1890X73 mm, IP40
EXE-P-GD-145W-IP40	EXE CIRCULAR LED, 145W, 14630LM, 2700/6500K, 79X2070X73 mm, IP40
EXE-P-GD-221W-IP40	EXE CIRCULAR LED 221W, 22025LM, 2700/6500K, 79X2070X73 mm, IP40
EXE-P-GD-158W-IP40	EXE CIRCULAR LED, 158W, 15960LM, 2700/6500K, 79X2254X73 mm, IP40
EXE-P-GD-240W-IP40	EXE CIRCULAR LED 240W, 24025LM, 2700/6500K, 79X2254X73 mm, IP40



Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231