




EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

CIRCULAR LED EXE-P-GDO-IP40

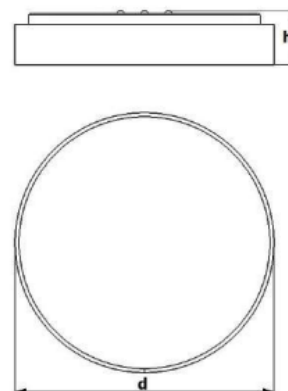

DATE ELECTRICE


Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	120°
Optional	dimabil/kit emergenta

DATE TEHNICE

Montaj	APLICAT/SUSPENDAT
Material	ALUMINIU
Finisaj	ALBNEGRU/RAL
Factor protectie [IP]	IP40
Factor protectie [IK]	IK08
Temperatura	5°C ... +30°C
Durata medie [h]	60000

MODELE

Cod	Descriere
EXE-P-GDO-18W-IP40	EXE CIRCULAR LED 18W, 1725W, 2700/6500K, D: 360 mm, H:97 mm, IP40
EXE-P-GDO-27W-IP40	EXE CIRCULAR LED 27W, 2585W, 2700/6500K, D: 470 mm, H:97 mm, IP40
EXE-P-GDO-40W-IP40	EXE CIRCULAR LED 40W, 3880W, 2700/6500K, D: 600 mm, H:97 mm, IP40
EXE-P-GDO-83W-IP40	EXE CIRCULAR LED 83W, 8185W, 2700/6500K, D: 900 mm, H:97 mm, IP40
EXE-P-GDO-147W-IP40	EXE CIRCULAR LED 147W, 14645W, 2700/6500K, D: 1200 mm, H:97 mm, IP40



Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231