




# EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

## CORP DE ILUMINAT LED EXE-P-HV-IP40

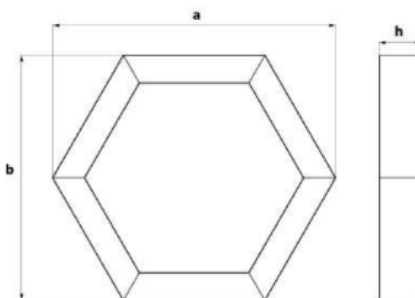

### DATE ELECTRICE

Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	120°
Optica	dimabil/kit emergenta

### DATE TEHNICE

Montaj	APLICAT/SUSPENDAT
Material	ALUMINIU
Finisaj	ALB/NEGRU/RAL
Factor protectie [IP]	IP40
Factor protectie [IK]	IK08
Temperatura	5°C ... +30°C
Durata medie [h]	60000

### MODELE

Cod	Descriere
EXE-P-HV-39W-IP40	EXE CORP DE ILUMINAT LED 39W, 3365LM, 2700/6500K, 641X555X97 mm, IP40
EXE-P-HV-61W-IP40	EXE CORP DE ILUMINAT LED 61W, 5065LM, 2700/6500K, 641X555X97 mm, IP40
EXE-P-HV-79W-IP40	EXE CORP DE ILUMINAT LED 79W, 6730LM, 2700/6500K, 1202X1041X97 mm, IP40
EXE-P-HV-120W-IP40	EXE CORP DE ILUMINAT LED 120W, 10125LM, 2700/6500K, 1202X1041X97 mm, IP40
EXE-P-HV-118W-IP40	EXE CORP DE ILUMINAT LED 118W, 10090LM, 2700/6500K, 1763X1527X97 mm, IP40
EXE-P-HV-180W-IP40	EXE CORP DE ILUMINAT LED 180W, 15190LM, 2700/6500K, 1763X1527X97 mm, IP40



#### Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135  
[www.exeholding.com](http://www.exeholding.com); [office@exeholding.com](mailto:office@exeholding.com); Phone: +40 722 241 231