




CORP DE ILUMINAT LED EXE-P-VS-IP40

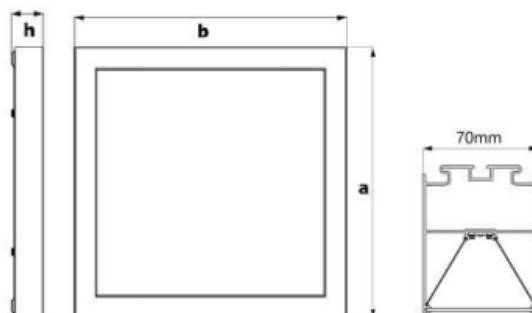

DATE ELECTRICE

Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	120°
Optional	dimabil/kit emergenta

DATE TEHNICE

Montaj	APLICAT/SUSPENDAT
Material	ALUMINIU
Finisaj	ALB/NEGRU/RAL
Factor protectie [IP]	IP40
Factor protectie [IK]	IK08
Temperatura	5°C ... +30°C
Durata medie [h]	60000

MODELE

Cod	Descriere
EXE-P-VS-53W-IP40	EXE CORP DE ILUMINAT LED 53W, 4790LM, 2700/6500K, 640X640X99mm, IP40
EXE-P-VS-79W-IP40	EXE CORP DE ILUMINAT LED 79W, 7185LM, 2700/6500K, 921X921X99mm, IP40
EXE-P-VS-105W-IP40	EXE CORP DE ILUMINAT LED 105W, 9580LM, 2700/6500K, 1201X1201X99mm, IP40
EXE-P-VS-132W-IP40	EXE CORP DE ILUMINAT LED 132W, 11970LM, 2700/6500K, 1482X1482X99mm, IP40
EXE-P-VS-158W-IP40	EXE CORP DE ILUMINAT LED 158W, 14365LM, 2700/6500K, 1763X1763X99mm, IP40
EXE-P-VS-205W-IP40	EXE CORP DE ILUMINAT LED 205W, 19155LM, 2700/6500K, 2325X2325X99mm, IP40
EXE-P-VS-66W-IP40	EXE CORP DE ILUMINAT LED 66W, 5985LM, 2700/6500K, 640X921X99mm, IP40
EXE-P-VS-79W-IP40	EXE CORP DE ILUMINAT LED 79W, 7185LM, 2700/6500K, 640X1201X99mm, IP40



Romania Office & Production:


Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231



EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

EXE-P-VS-92W-IP40	EXE CORP DE ILUMINAT LED 92W, 8380LM, 2700/6500K, 921X1201X99mm, IP40
EXE-P-VS-105W-IP40	EXE CORP DE ILUMINAT LED 105W, 9580LM, 2700/6500K, 921X1482X99mm, IP40

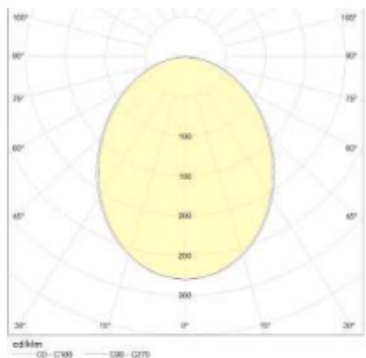

Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231