




## CORP DE ILUMINAT LED EXE-P-VY-IP40

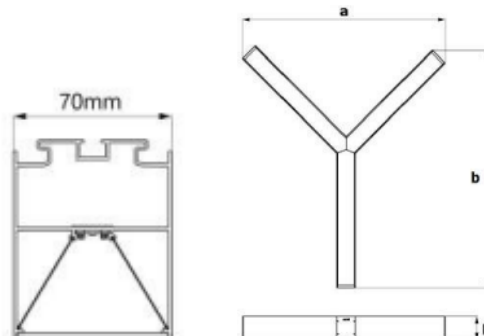

### DATE ELECTRICE


Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	120°
Optional	dimabil/kit emergenta

### DATE TEHNICE

Montaj	APLICAT/SUSPENDAT
Material	ALUMINIU
Finisaj	ALB/NEGRU/RAL
Factor protectie [IP]	IP40
Factor protectie [IK]	IK08
Temperatura	5°C ... +30°C
Durata medie [h]	60000

### MODELE

Cod	Descriere
EXE-P-VY-39W-IP40	EXE CORP DE ILUMINAT LED 39W, 3880LM, 2700/6500K, 870X994X90 mm, IP40
EXE-P-VY-60W-IP40	EXE CORP DE ILUMINAT LED 60W, 5815LM, 2700/6500K, 1267X1472X90 mm, IP40
EXE-P-VY-79W-IP40	EXE CORP DE ILUMINAT LED 79W, 7755LM, 2700/6500K, 1663X1951X90 mm, IP40
EXE-P-VY-99W-IP40	EXE CORP DE ILUMINAT LED 99W, 9690LM, 2700/6500K, 2060X2430X90 mm, IP40



### Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135  
[www.exeholding.com](http://www.exeholding.com); [office@exeholding.com](mailto:office@exeholding.com); Phone: +40 722 241 231