




Exe Holding - Statie incarcare - Cutie montaj perete 1 priza 7.4kW cu blocare mufa

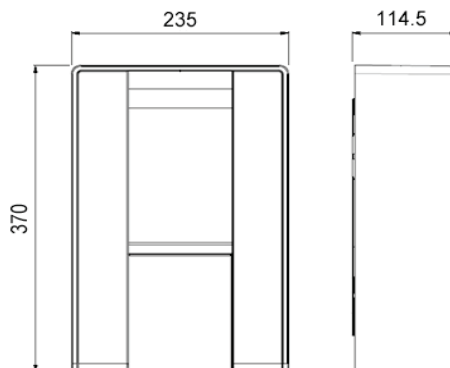

FUNCTII

Incarcare cu identificare a setului de cabluri conectate,
protectie impotriva contactului direct - Safety Child

Shutters,

Masurare energie si identificarea consumului de
curent pentru utilizatorul autorizat

Gestionarea sistemului de blocare in modul de
functionare autonom sau predispozitia personala
pentru comunicarea in serie

STANDARDE

IEC/EN 61851-1 - Sistem de încărcare conductivă
pentru vehicule electrice. Partea 1: Prescripții generale

IEC/EN 61439-7 - Ansambluri de aparatura de joasa
tensiune si aparate de comanda. Partea 7: Ansambluri
pentru statii de incarcare.

DIMENSIUNI

Curent nominal	32A
Tensiune nominala	400Vac
Frecventa	50-60Hz
Tensiune	500V
Grad protectie	IP54
Temperatura operare	-25°C +40°C
Material	Plastic
Glow wire test	650°C
Protectie IK la 20°C	IK08
Culoare	Antracit
Montaj	Perete
Coroziune	Rezistent
Radiatii UV	Rezistent

ECHIPAMENTE

1 banda terminal 3x10mm²
1 transformator
1 contactor modular 2P 40A 24Vdc
1 detector scurgeri DC
1 suport sigurante 1P+N gG 4A
1 sursa alimentare electrica 24Vdc 36W
1 card control
1 banda LED RGB
1 buton oprire incarcare (mod liber)
1 baterie backup

exclude (protectii de la instalator):
1 intrerupator 1P+N C40 30mA ist. A



Bucharest, Romania Office: Aeroportului Str., No. 141th, Mogosoaia, Ilfov, Romania, PO Box 077135

Vienna, Austria Office: Martin Str., No 51st, Vienna, Austria, PO Box 1180

London, United Kingdom Office: 3rd The Shrubberies, George Lane, South Woodford, London, PO Box E18 1BG

New York, USA Office: 46-12 Queens Blvd. No. 205th, Sunnyside, NY., USA, PO Box 11104

WEB: www.exeholding.com **E-mail:** office@exeholding.com