



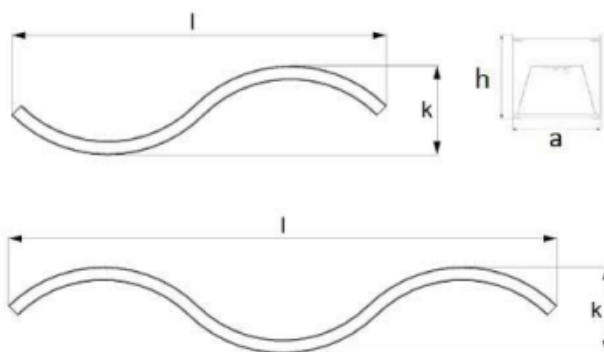

EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

LINIAR LED EXE-P-GS-IP40

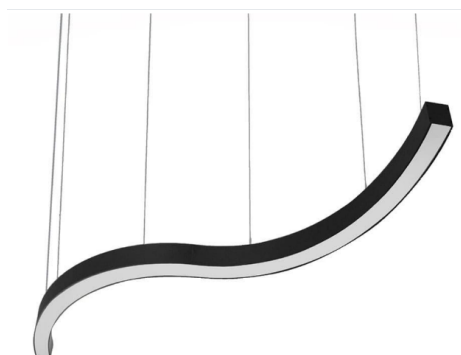

DATE ELECTRICE

Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	120°
Optional	dimabil/kit emergenta

DATE TEHNICE

Montaj	APLICAT
Material	ALUMINIU
Finisaj	ALB/NEGRU/RAL
Factor protectie [IP]	IP40
Factor protectie [IK]	IK08
Temperatura	5°C ... +30°C
Durata medie [h]	60000

MODELE

Cod	Descriere
EXE-P-GS-39W-IP40	EXE LINIAR LED 39W, 3880LM, 2700/6500K, 79X1570X73 mm, IP40
EXE-P-GS-61W-IP40	EXE LINIAR LED 61W, 5835LM, 2700/6500K, 79X1570X73 mm, IP40
EXE-P-GS-60W-IP40	EXE LINIAR LED 60W, 5815LM, 2700/6500K, 79X2360X73 mm, IP40
EXE-P-GS-90W-IP40	EXE LINIAR LED 90W, 8755LM, 2700/6500K, 79X2360X73 mm, IP40
EXE-P-GS-53W-IP40	EXE LINIAR LED 53W, 5170LM, 2700/6500K, 79X2070X73 mm, IP40
EXE-P-GS-80W-IP40	EXE LINIAR LED 80W, 7780LM, 2700/6500K, 79X2070X73 mm, IP40
EXE-P-GS-79W-IP40	EXE LINIAR LED 79W, 7755LM, 2700/6500K, 79X495X73 mm, IP40
EXE-P-GS-120W-IP40	EXE LINIAR LED 120W, 11670LM, 2700/6500K, 79X3095X73 mm, IP40
EXE-P-GS-66W-IP40	EXE LINIAR LED 66W, 6460LM, 2700/6500K, 79X2620X73 mm, IP40
EXE-P-GS-100W-IP40	EXE LINIAR LED 100W, 9725LM, 2700/6500K, 79X2620X73 mm, IP40



Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231

