




EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

LINIAR LED EXE-P-GSV-IP40

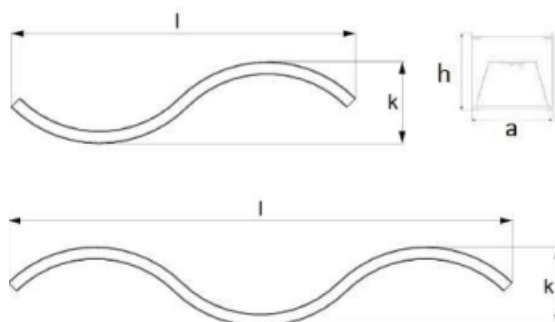

DATE ELECTRICE

Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	120°

DATE TEHNICE

Montaj	APLICAT
Material	ALUMINIU
Finisaj	ALB/NEGRU/RAL
Factor protectie [IP]	IP40
Factor protectie [IK]	IK08
Temperatura	5°C ... +30°C
Durata medie [h]	60000

MODELE

Cod	Descriere
EXE-P-GSV-18W-IP40	EXE LINIAR LED 18W, 1560LM, 2700/6500K, 79X1570X82 mm, IP40
EXE-P-GSV-27W-IP40	EXE LINIAR LED 27W, 2340LM, 2700/6500K, 79X1570X82 mm, IP40
EXE-P-GSV-27W-IP40	EXE LINIAR LED 27W, 2340LM, 2700/6500K, 79X2360X82 mm, IP40
EXE-P-GSV-40W-IP40	EXE LINIAR LED 40W, 3510LM, 2700/6500K, 79X2360X82 mm, IP40
EXE-P-GSV-24W-IP40	EXE LINIAR LED 24W, 2080LM, 2700/6500K, 79X2070X82 mm, IP40
EXE-P-GSV-36W-IP40	EXE LINIAR LED 36W, 3120LM, 2700/6500K, 79X2070X82 mm, IP40
EXE-P-GSV-36W-IP40	EXE LINIAR LED 36W, 3120LM, 2700/6500K, 79X3095X82 mm, IP40
EXE-P-GSV-54W-IP40	EXE LINIAR LED 54W, 4680LM, 2700/6500K, 79X3095X82 mm, IP40
EXE-P-GSV-30W-IP40	EXE LINIAR LED 30W, 2600LM, 2700/6500K, 79X2620X82 mm, IP40
EXE-P-GSV-45W-IP40	EXE LINIAR LED 45W, 3900LM, 2700/6500K, 79X2620X82 mm, IP40



Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231

