



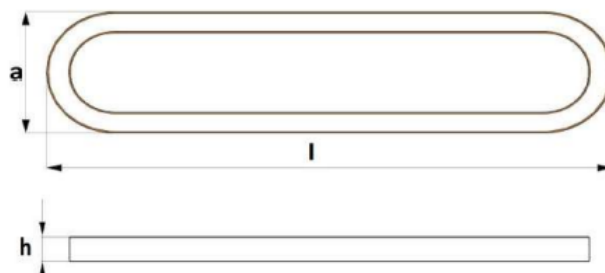

EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

OVAL LED EXE-P-GO-IP40

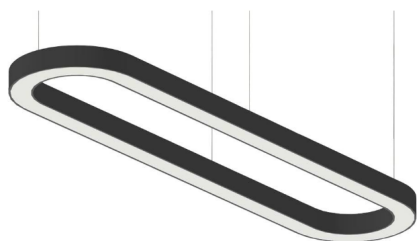

DATE ELECTRICE


Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	120°
Optional	dimabil/kit emergenta

DATE TEHNICE

Montaj	SUSPENDAT
Material	ALUMINIU
Finisaj	ALB/NEGRU/RAL
Factor protectie [IP]	IP40
Factor protectie [IK]	IK08
Temperatura	5°C ... +30°C
Durata medie [h]	60000

MODELE

Cod	Descriere
EXE-P-GO-53W-IP40	EXE OVAL LED 53W, 5170LM, 2700/6500K, 447X1010X73 mm, IP40
EXE-P-GO-80W-IP40	EXE OVAL LED 80W, 7780LM, 2700/6500K, 447X1010X73 mm, IP40
EXE-P-GO-66W-IP40	EXE OVAL LED 66W, 6460LM, 2700/6500K, 447X1290X73 mm, IP40
EXE-P-GO-100W-IP40	EXE OVAL LED 100W, 9725LM, 2700/6500K, 447X1290X73 mm, IP40
EXE-P-GO-79W-IP40	EXE OVAL LED 79W, 7755LM, 2700/6500K, 447X1571X73 mm, IP40
EXE-P-GO-120W-IP40	EXE OVAL LED 120W, 11670LM, 2700/6500K, 447X1571X73 mm, IP40
EXE-P-GO-92W-IP40	EXE OVAL LED 92W, 9045LM, 2700/6500K, 447X1851X73 mm, IP40
EXE-P-GO-140W-IP40	EXE OVAL LED 140W, 13615LM, 2700/6500K, 447X1851X73 mm, IP40



Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231