




EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

DOWNLIGHT LED EXE-GT-MP

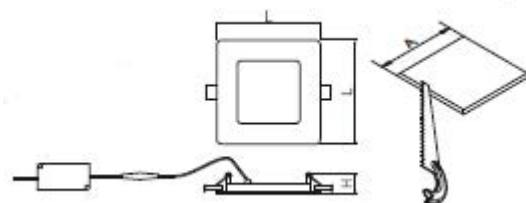

DATE ELECTRICE

Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.5
CRI [RA]	>80
Optica	120°

DATE TEHNICE

Montaj	INCASTRAT
Material	ALUMINIU
Finisaj	ALB
Factor protectie [IP]	IP20/44
Factor protectie [IK]	IK09
Temperatura	5°C ... +30°C
Durata medie [h]	40000

MODELE

Cod	Descriere
EXE-GT-MP-3W-IP20/44	EXE DOWNLIGHT LED 3W, 200LM, 3000/4000K, 86X22 mm, IP20/44
EXE-GT-MP-7W-IP20/44	EXE DOWNLIGHT LED 7W, 560LM, 3000/4000K, 120X22 mm, IP20/44
EXE-GT-MP-13W-IP20/44	EXE DOWNLIGHT LED 13W, 1020LM, 3000/4000K, 170X22 mm, IP20/44
EXE-GT-MP-19W-IP20/44	EXE DOWNLIGHT LED 19W, 1520LM, 3000/4000K, 224X22 mm, IP20/44
EXE-GT-MP-24W-IP20/44	EXE DOWNLIGHT LED 24W, 2000LM, 3000/4000K, 300X22 mm, IP20/44



Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231