




EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

DOWNLIGHT LED EXE-P-SFD-IP40

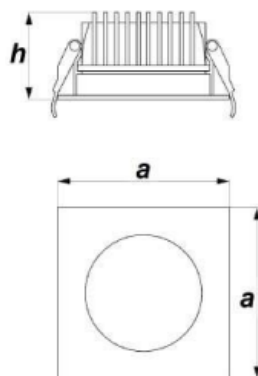

DATE ELECTRICE

Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	120°
Optional	dimabil/kit de emergenta

DATE TEHNICE

Montaj	INCASTRAT
Material	ALUMINIU
Finisaj	ALB
Factor protectie [IP]	IP40
Factor protectie [IK]	IK09
Temperatura	5°C ... +30°C
Durata medie [h]	60000

MODELE

Cod	Desscriere
EXE-P-SFD-9W-IP40	EXE DOWNLIGHT LED 9W, 780LM, 2700/6500K, D: 97 mm, H:55 mm, IP40
EXE-P-SFD-10W-IP40	EXE DOWNLIGHT LED 10W, 850LM, 2700/6500K, D: 117 mm, H:50 mm, IP40
EXE-P-SFD-14W-IP40	EXE DOWNLIGHT LED 14W, 1200LM, 2700/6500K, D: 117 mm, H:50 mm, IP40
EXE-P-SFD-11W-IP40	EXE DOWNLIGHT LED 11W, 950LM, 2700/6500K, D: 147 mm, H:55 mm, IP40
EXE-P-SFD-15W-IP40	EXE DOWNLIGHT LED 15W, 1300LM, 2700/6500K, D: 147 mm, H:55 mm, IP40
EXE-P-SFD-11W-IP40	EXE DOWNLIGHT LED 11W, 970LM, 2700/6500K, D: 175 mm, H:58 mm, IP40
EXE-P-SFD-15W-IP40	EXE DOWNLIGHT LED 15W, 1320LM, 2700/6500K, D: 175 mm, H:58 mm, IP40



Romania Office & Production:


Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231



EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

EXE-P-SFD-19W-IP40	EXE DOWNLIGHT LED 19W, 1580LM, 2700/6500K, D: 192 mm, H:55 mm, IP40
EXE-P-SFD-27W-IP40	EXE DOWNLIGHT LED 27W, 2020LM, 2700/6500K, D: 192 mm, H:55 mm, IP40
EXE-P-SFD-19W-IP40	EXE DOWNLIGHT LED 19W, 1600LM, 2700/6500K, D: 227 mm, H:58 mm, IP40
EXE-P-SFD-27W-IP40	EXE DOWNLIGHT LED 27W, 2040LM, 2700/6500K, D: 227 mm, H:58 mm, IP40
EXE-P-SFD-30W-IP40	EXE DOWNLIGHT LED 30W, 2625LM, 2700/6500K, D: 227 mm, H:58 mm, IP40

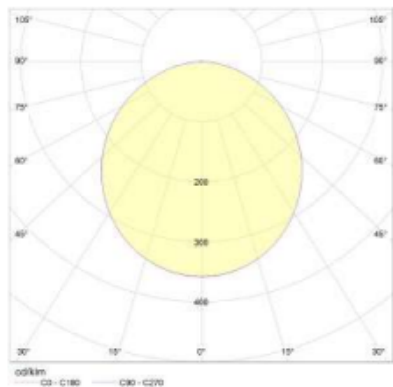

ISO 9001



ISO 14001



ISO 27001



ISO 45001



ISO 37001



ISO 50001

Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135

www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231