




# EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

## LINIAR LED EXE-P-EDDI-IP40

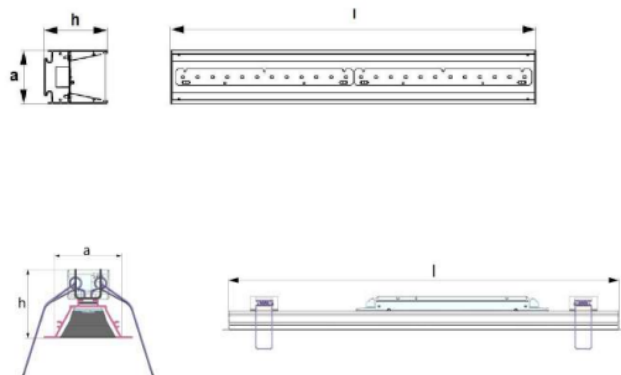

### DATE ELECTRICE

Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	50/80°
UGR	<19
Optional	dimabil/kit emergenta

### DATE TEHNICE

Montaj	APLICAT/SUSPENDAT/ INCASTRAT
Material	ALUMINIU
Finisaj	ALB/NEGRU/RAL
Factor protectie [IP]	IP40
Factor protectie [IK]	IK08
Temperatura	5°C ... +30°C
Durata medie [h]	60000



### Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135  
[www.exeholding.com](http://www.exeholding.com); [office@exeholding.com](mailto:office@exeholding.com); Phone: +40 722 241 231



# EXE GREEN HOLDING


ENERGY EFFICIENCY SOLUTIONS

## MODELE

Cod	Descriere
EXE-P-EDDI-16W-IP40	EXE LINIAR LED, 16W, 2000LM, 47X580X73 mm, IP40
EXE-P-EDDI-22W-IP40	EXE LINIAR, LED, 22W, 2995LM, 47X860X73 mm, IP40
EXE-P-EDDI-29W-IP40	EXE LINIAR, LED, 29W, 3995LM, 47X1140X73 mm, IP40
EXE-P-EDDI-37W-IP40	EXE LINIAR, LED, 37W, 4995LM, 47X1420X73 mm, IP40
EXE-P-EDDI-44W-IP40	EXE LINIAR, LED, 44W, 5990LM, 47X1700X73 mm, IP40
EXE-P-EDDI-52W-IP40	EXE LINIAR, LED, 52W, 6990LM, 47X1980X73 mm, IP40
EXE-P-EDDI-60W-IP40	EXE LINIAR, LED, 60W, 7985LM, 47X2260X73 mm, IP40
EXE-P-EDDI-66W-IP40	EXE LINIAR, LED, 66W, 8985LM, 47X2540X73 mm, IP40
EXE-P-EDDI-75W-IP40	EXE LINIAR, LED, 75W, 9985LM, 47X2819X73 mm, IP40
EXE-P-EDDI-16/14W-IP40	EXE LINIAR UP&DOWN LED, 16/14W, 1330/2000LM, 47X580X73 mm, IP40
EXE-P-EDDI-22/21W-IP40	EXE LINIAR UP&DOWN LED, 22/21W, 1995/2995LM, 47X860X73 mm, IP40
EXE-P-EDDI-26/29W-IP40	EXE LINIAR UP&DOWN LED, 26/29W, 2660/3995LM, 47X1140X73 mm, IP40
EXE-P-EDDI-33/37W-IP40	EXE LINIAR UP&DOWN LED, 33/37W, 3325/4995LM, 47X1420X73 mm, IP40
EXE-P-EDDI-39/44W-IP40	EXE LINIAR UP&DOWN LED, 39/44W, 3990/5990LM, 47X1700X73 mm, IP40
EXE-P-EDDI-47/52W-IP40	EXE LINIAR UP&DOWN LED, 47/52W, 4655/6990LM, 47X1980X73 mm, IP40
EXE-P-EDDI-53/60W-IP40	EXE LINIAR UP&DOWN LED, 53/60W, 5320/7985LM, 47X2260X73 mm, IP40
EXE-P-EDDI-60/66W-IP40	EXE LINIAR UP&DOWN LED, 60/66W, 5985/8985LM, 47X2540X73 mm, IP40
EXE-P-EDDI-66/75W-IP40	EXE LINIAR UP&DOWN LED, 66/75W, 6650/9985LM, 47X2819X73 mm, IP40
EXE-P-EDDI-37W-IP40	EXE LINIAR MIXT LED, 37W, 3430LM, 47X1140X73 mm, IP40
EXE-P-EDDI-46W-IP40	EXE LINIAR MIXT LED, 46W, 4145LM, 47X1421X73 mm, IP40
EXE-P-EDDI-57W-IP40	EXE LINIAR MIXT LED, 57W, 4860LM, 47X1700X73 mm, IP40
EXE-P-EDDI-67W-IP40	EXE LINIAR MIXT LED, 67W, 5575LM, 47X1981X73 mm, IP40



80° Light Beam



50° Light Beam



ISO 9001



ISO 14001



ISO 27001



ISO 45001



ISO 37001



ISO 50001

### Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135

[www.exeholding.com](http://www.exeholding.com); [office@exeholding.com](mailto:office@exeholding.com); Phone: +40 722 241 231