




# EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

## LINIAR LED EXE-P-IP40

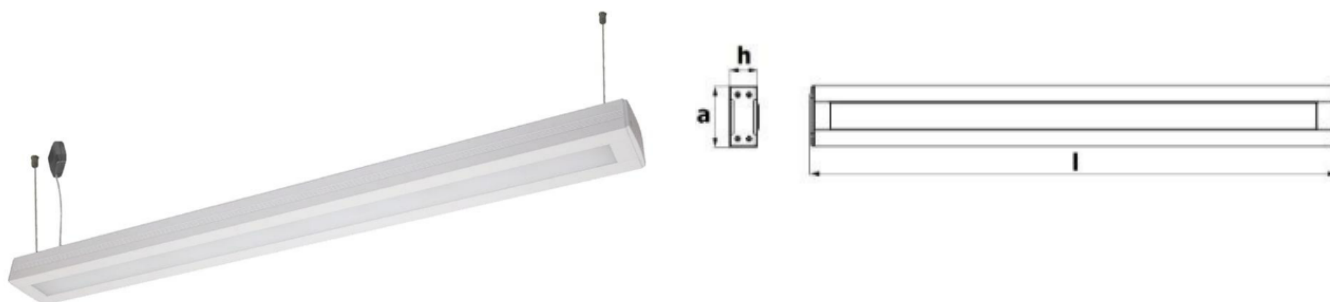

### DATE ELECTRICE


Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	120°
Optional	dimabil/kit emergenta

### DATE TEHNICE

Montaj	SUSPENDAT
Material	ALUMINIU
Finisaj	ALB/NEGRU/RAL
Factor protectie [IP]	IP40
Factor protectie [IK]	IK08
Temperatura	5°C ... +30°C
Durata medie [h]	60000

### MODELE

Cod	Descriere
EXE-P-S-21W-IP40	EXE LINIAR LED 21W, 2140LM, 2700/6500K, 104X628X48 mm, IP40
EXE-P-S-33W-IP40	EXE LINIAR LED 33W, 3565LM, 2700/6500K, 104X908X48 mm, IP40
EXE-P-S-47W-IP40	EXE LINIAR LED 47W, 4990LM, 2700/6500K, 104X1189X48 mm, IP40
EXE-P-S-60W-IP40	EXE LINIAR LED 60W, 6415LM, 2700/6500K, 104X1469X48 mm, IP40

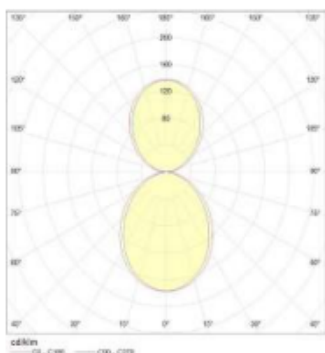

### Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135  
[www.exeholding.com](http://www.exeholding.com); [office@exeholding.com](mailto:office@exeholding.com); Phone: +40 722 241 231