




EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

LINIAR LED EXE-P-SDI-IP40



DATE ELECTRICE

Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	120°
Optional	dimabil/kit emergenta

DATE TEHNICE

Montaj	APLICAT/SUSPENDAT/ INCASTRAT
Material	ALUMINIU
Finisaj	ALB/NEGRU/RAL
Factor protectie [IP]	IP40
Factor protectie [IK]	IK08
Temperatura	5°C ... +30°C
Durata medie [h]	60000

MODELE

Cod	Descriere
EXE-P-SDI-14/8W-IP40	EXE LINIAR UP&DOWN LED 14/8W, 1290/665LM, 2700/6500K, 40X570X76 mm, IP40
EXE-P-SDI-21/14W-IP40	EXE LINIAR UP&DOWN LED 21/14W, 1940/1330LM, 2700/6500K, 40X850X76 mm, IP40
EXE-P-SDI-26/21W-IP40	EXE LINIAR UP&DOWN LED 26/21W, 2585/1995LM, 2700/6500K, 40X1130X76 mm, IP40
EXE-P-SDI-33/26W-IP40	EXE LINIAR UP&DOWN LED 33/26W, 3230/2660LM, 2700/6500K, 40X1410X76 mm, IP40
EXE-P-SDI-39/33W-IP40	EXE LINIAR UP&DOWN LED 39/33W, 3875/3325LM, 2700/6500K, 40X1693X76 mm, IP40
EXE-P-SDI-47/39W-IP40	EXE LINIAR UP&DOWN LED 47/39W, 4520/3990LM, 2700/6500K, 40X1973X76 mm, IP40



ISO 9001



ISO 14001



ISO 27001



ISO 45001



ISO 37001



ISO 50001

Romania Office & Production:



Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231



EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

EXE-P-SDI-53/47W-IP40	EXE LINIAR UP&DOWN LED 53/47W, 5170/4665LM, 2700/6500K, 40X2254X76 mm, IP40
EXE-P-SDI-60/53W-IP40	EXE LINIAR UP&DOWN LED 60/53W, 5815/5320LM, 2700/6500K, 40X2534X76 mm, IP40
EXE-P-SDI-66/60W-IP40	EXE LINIAR UP&DOWN LED 66/60W, 6460/5985LM, 2700/6500K, 40X2815X76 mm, IP40
EXE-P-SDI-14W-IP40	EXE LINIAR LED 14W, 1290LM, 2700/6500K, 40X570X76 mm, IP40
EXE-P-SDI-21W-IP40	EXE LINIAR LED 21W, 1940LM, 2700/6500K, 40X850X76 mm, IP40
EXE-P-SDI-26W-IP40	EXE LINIAR LED 26W, 2585LM, 2700/6500K, 40X1130X76 mm, IP40
EXE-P-SDI-33W-IP40	EXE LINIAR LED 33W, 3230LM, 2700/6500K, 40X1410X76 mm, IP40
EXE-P-SDI-39W-IP40	EXE LINIAR LED 39W, 3875LM, 2700/6500K, 40X1693X76 mm, IP40
EXE-P-SDI-47W-IP40	EXE LINIAR LED 47W, 4520LM, 2700/6500K, 40X1973X76 mm, IP40
EXE-P-SDI-53W-IP40	EXE LINIAR LED 53W, 5170LM, 2700/6500K, 40X2254X76 mm, IP40
EXE-P-SDI-60W-IP40	EXE LINIAR LED 60W, 5815LM, 2700/6500K, 40X2534X76 mm, IP40
EXE-P-SDI-66W-IP40	EXE LINIAR LED 66W, 6460LM, 2700/6500K, 40X2815X76 mm, IP40

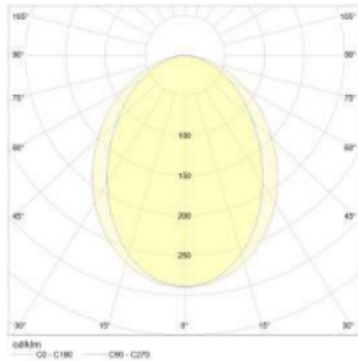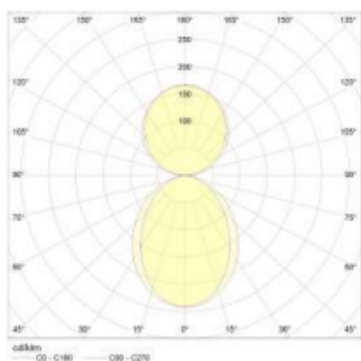

ISO 9001



ISO 14001



ISO 27001



ISO 45001



ISO 37001



ISO 50001

Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135

www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231