




PROIECTOR LED EXE-P-TL2-IP40

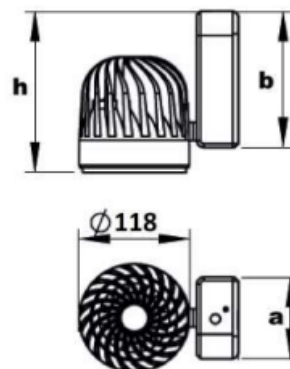

DATE ELECTRICE


Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	15/30/45/60°
Optional	dimabil/kit de emergenta

DATE TEHNICE

Montaj	SINA
Material	ALUMINIU
Finisaj	ALB
Factor protectie [IP]	IP40
Factor protectie [IK]	IK09
Temperatura	5°C ... +30°C
Durata medie [h]	60000

MODELE

Cod	Descriere
EXE-P-TL2-21W-IP40	EXE PROIECTOR LED 21W, 1910LM, 2700/6500K, 90X150X178 mm, IP40
EXE-P-TL2-28W-IP40	EXE PROIECTOR LED 28W, 2870LM, 2700/6500K, 90X150X178 mm, IP40
EXE-P-TL2-36W-IP40	EXE PROIECTOR LED 36W, 3420LM, 2700/6500K, 90X150X178 mm, IP40
EXE-P-TL2-42W-IP40	EXE PROIECTOR LED 42W, 13660LM, 2700/6500K, 90X150X178 mm, IP40

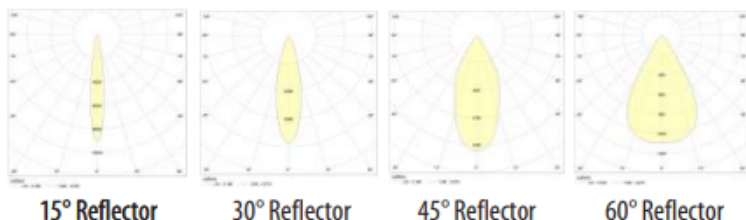

Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231



EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

ACCESORII



Sina




Conector flexibil



Conector +



Conector liniar



Conector T



Capat alimentare



Conector L



Capac inchidere



Alimentare centrala



Canopie



Conector flexibil



Kit suspensie



ISO 9001



ISO 14001



ISO 27001



ISO 45001



ISO 37001



ISO 50001

Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231