




EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

SPOT LED EXE-P-RAD-IP40

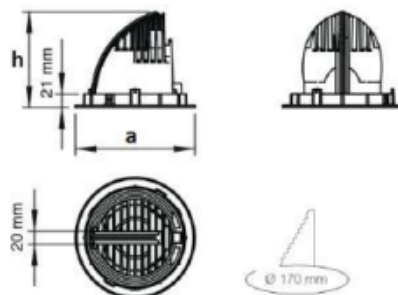

DATE ELECTRICE


Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	15/30/45/60°
Optional	dimabil/kit de emergenta

DATE TEHNICE

Montaj	INCASTRAT
Material	ALUMINIU
Finisaj	ALB
Factor protectie [IP]	IP40
Factor protectie [IK]	IK09
Temperatura	5°C ... +30°C
Durata medie [h]	60000

MODELE

Cod	Descriere
EXE-P-RAD-21W-IP40	EXE SPOT LED 21W, 1910LM, 2700/6500K, D: 185 mm, H:146 mm, IP40
EXE-P-RAD-28W-IP40	EXE SPOT LED 28W, 2870LM, 2700/6500K, D: 185 mm, H:146 mm, IP40
EXE-P-RAD-36W-IP40	EXE SPOT LED 36W, 3420LM, 2700/6500K, D: 185 mm, H:146 mm, IP40

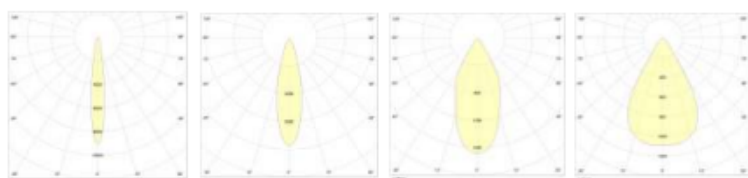

15° Reflector

30° Reflector

45° Reflector

60° Reflector



Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135
www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231