




EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

SPOT LED EXE-P-RAD2-IP40

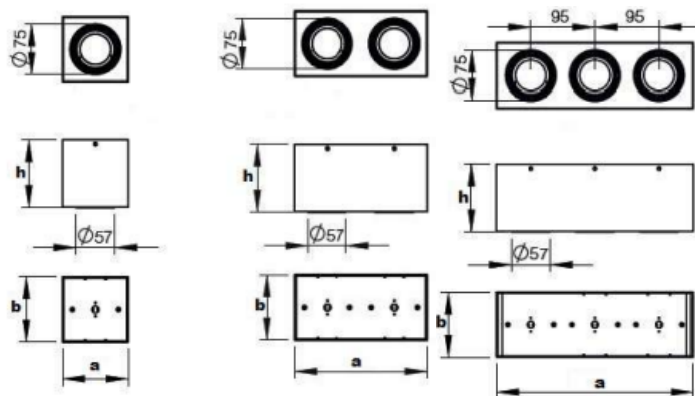

DATE ELECTRICE

Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	120°
Optional	dimabil/kit de emergenta

DATE TEHNICE

Montaj	APLICAT
Material	ALUMINIU
Finisaj	ALB
Factor protectie [IP]	IP40
Factor protectie [IK]	IK09
Temperatura	5°C ... +30°C
Durata medie [h]	60000

MODELE

Cod	Descriere
EXE-P-RAD2-28W-IP40	EXE SPOT LED 28W, 2870LM, 2700/6500K, 190X190X119 mm, IP40
EXE-P-RAD2-36W-IP40	EXE SPOT LED 36W, 3420LM, 2700/6500K, 190X190X119 mm, IP40
EXE-P-RAD2-56W-IP40	EXE SPOT LED 56W, 5740LM, 2700/6500K, 360X190X119 mm, IP40
EXE-P-RAD2-72W-IP40	EXE SPOT LED 72W, 6840LM, 2700/6500K, 360X190X119 mm, IP40
EXE-P-RAD2-84W-IP40	EXE SPOT LED 84W, 8610LM, 2700/6500K, 530X190X119 mm, IP40
EXE-P-RAD2-108W-IP40	EXE SPOT LED 108W, 10260LM, 2700/6500K, 530X190X119 mm, IP40



ISO 9001



ISO 14001



ISO 27001



ISO 45001



ISO 37001



ISO 50001

Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135

www.exeholding.com; office@exeholding.com; Phone: +40 722 241 231