




# EXE GREEN HOLDING

ENERGY EFFICIENCY SOLUTIONS

## SPOT LED EXE-P-SMA-IP40

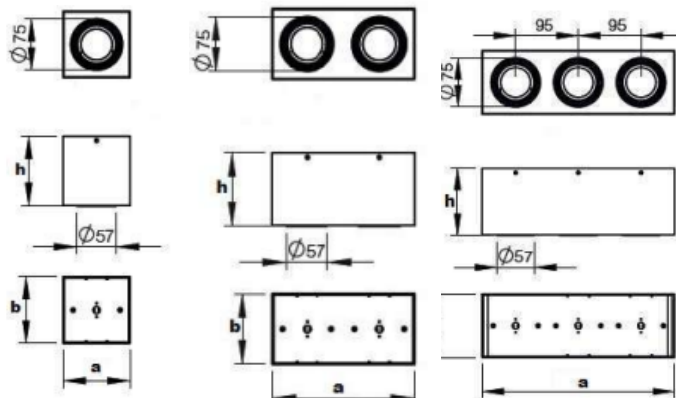

### DATE ELECTRICE

Voltage [V]	220-240
Frecventa [Hz]	50/60
Sursa	LED
Power factor PF	>0.9
CRI [RA]	>80
Optica	120°
Optional	dimabil/kit de emergenta

### DATE TEHNICE

Montaj	APLICAT
Material	ALUMINIU
Finisaj	ALB
Factor protectie [IP]	IP40
Factor protectie [IK]	IK09
Temperatura	5°C ... +30°C
Durata medie [h]	60000

### MODELE

Cod	Descriere
EXE-P-SMA-9W-IP40	EXE SPOT LED 9W, 630LM, 2700/6500K, 97X97X100 mm, IP40
EXE-P-SMA-17W-IP40	EXE SPOT LED 17W, 1255LM, 2700/6500K, 197X97X100 mm, IP40
EXE-P-SMA-25W-IP40	EXE SPOT LED 25W, 1890LM, 2700/6500K, 292X97X100 mm, IP40



### Romania Office & Production:

Aeroportului no.141 Street, Mogosoaia, Ilfov, PO 077135  
[www.exeholding.com](http://www.exeholding.com); [office@exeholding.com](mailto:office@exeholding.com); Phone: +40 722 241 231